


TREE PLANTING DETAIL - 2" CALIPER AND LARGER

BIODEGRADABLE TREE SHELTER

1. TREE SHELTER MUST BE MADE OF 100% BIODEGRADABLE MATERIALS.
2. TREE SHELTER SHOULD BE MADE OF HARDWOOD SLATS WOVEN TOGETHER WITH NATURAL ROPING.
3. TREE SHELTER MUST HAVE LONGER, HARDY STAKES FOR INSERTION INTO GROUND TO PROVIDE SUPPORT.

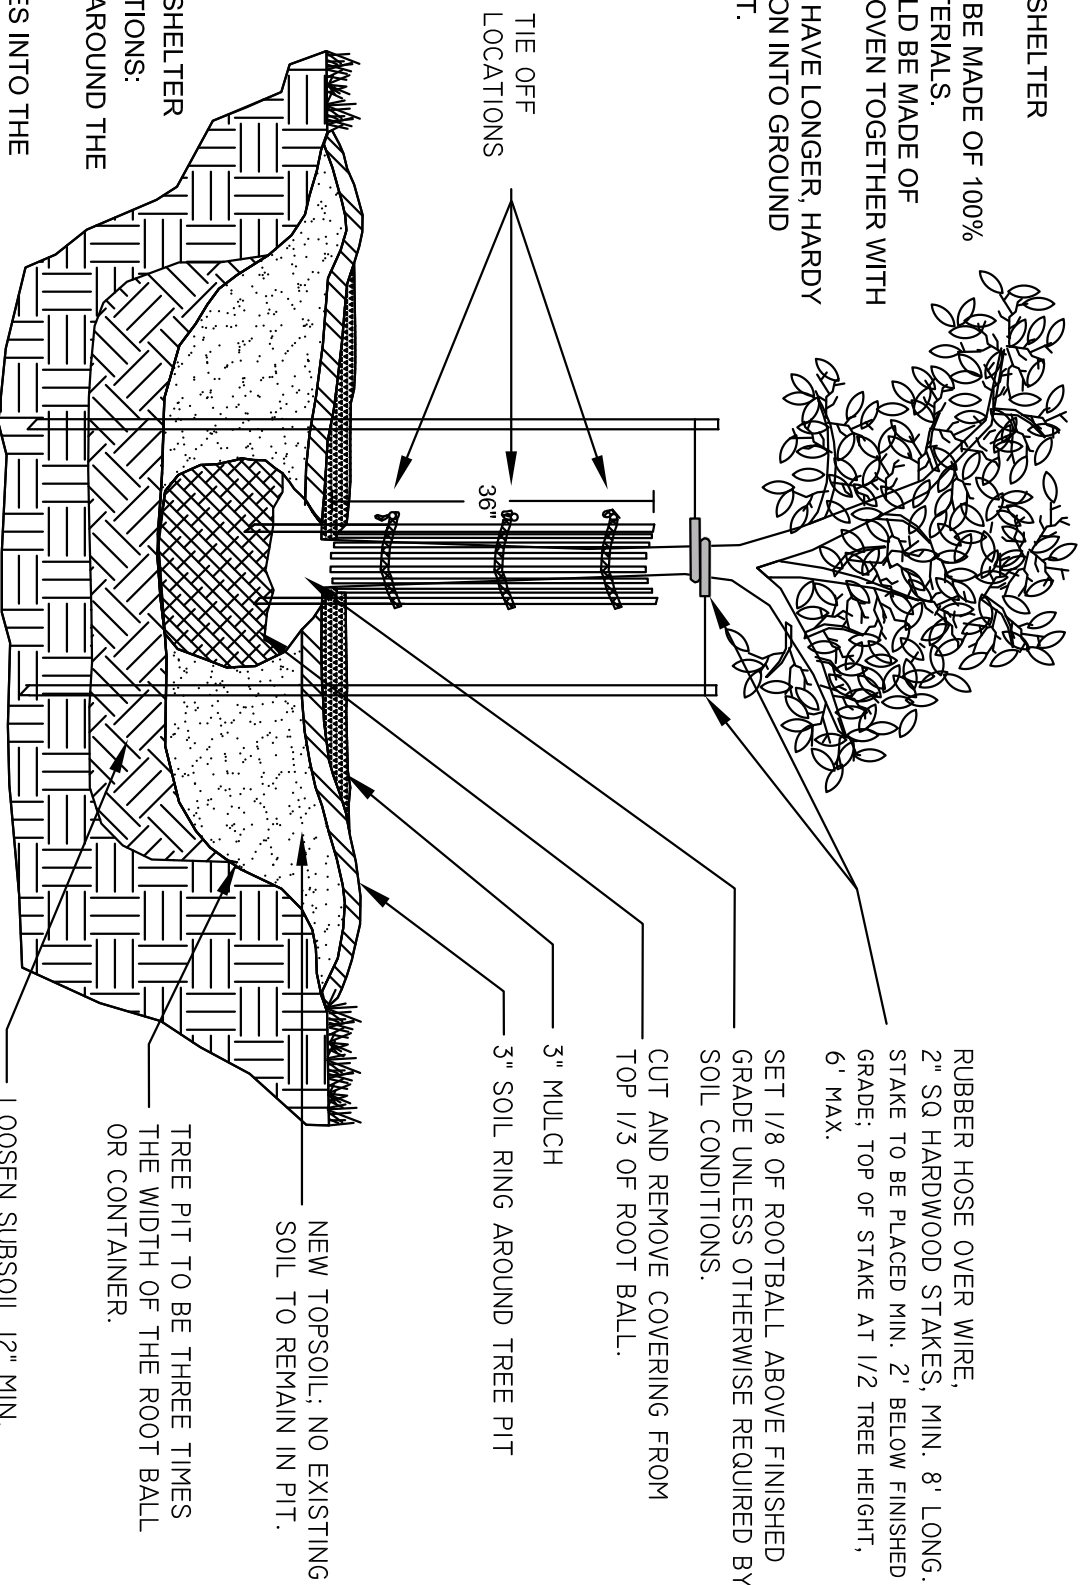

- BIODEGRADABLE TREE SHELTER
INSTALLATION INSTRUCTIONS:
1. PLACE THE SHELTER AROUND THE TREE.
 2. DRIVE LONGER STAKES INTO THE GROUND.
 3. TIE-OFF ROPE ENDS AROUND TREE.

RUBBER HOSE OVER WIRE,
2" SQ HARDWOOD STAKES, MIN. 8' LONG,
STAKE TO BE PLACED MIN. 2' BELOW FINISHED
GRADE; TOP OF STAKE AT 1/2 TREE HEIGHT,
6' MAX.
SET 1/8 OF ROOTBALL ABOVE FINISHED
GRADE UNLESS OTHERWISE REQUIRED BY
SOIL CONDITIONS.

CUT AND REMOVE COVERING FROM
TOP 1/3 OF ROOT BALL.

3" MULCH

3" SOIL RING AROUND TREE PIT

NEW TOPSOIL; NO EXISTING
SOIL TO REMAIN IN PIT.

TREE PIT TO BE THREE TIMES
THE WIDTH OF THE ROOT BALL
OR CONTAINER.

LOOSEN SUBSOIL 12" MIN.